

ProLine

TS 63 E



ProLine TS 63 E is a very energy efficient drying cabinet that dries textiles and accessories without mechanical action, ideal for drying delicate garments that should not be tumble dried. The innovative drying cabinet fits in laundry spaces where robust and reliable drying cabinets are required. This drying cabinet is equipped with a swinging rail system for easy use but can also be equipped with a single bar for standard hangers.



Fast drying cabinet

TS 63 E is an efficient drying cabinet. If it is important that it goes quickly, the TS 63 E is an optimal drying cabinet.

Saves energy


TS 63 E is equipped with HTS (Humidity Tracking System) which senses the moisture level and interrupts the drying process exactly when the laundry is dry. TS 63 E consumes only 3.0 kWh / drying cycle.

Standard Features

- HTS - Humidity Tracking System with temperature and humidity sensors.
- High temperature programs, up to 195F, greatly reduces bacterial contaminants and allergens.
- Microprocessor control with manual and automatic modes.
- Hanging rail rotates out 180° and doors open 190°.
- Double overheat protection with backup sensor for increased safety.
- Electric heated.
- Interior lighting.
- Easy to navigate programs with display, buttons and braille. Easy to reach display panel.
- Four automatic drying programs and one timed program.
- Adjustable preset start time.
- Adjustable feet from the inside of the cabinet.
- Powder coated galvanized steel.

Optional Features

- Single hanging bar.
- Door hook racks attached on the inside of the door for additional accessories.

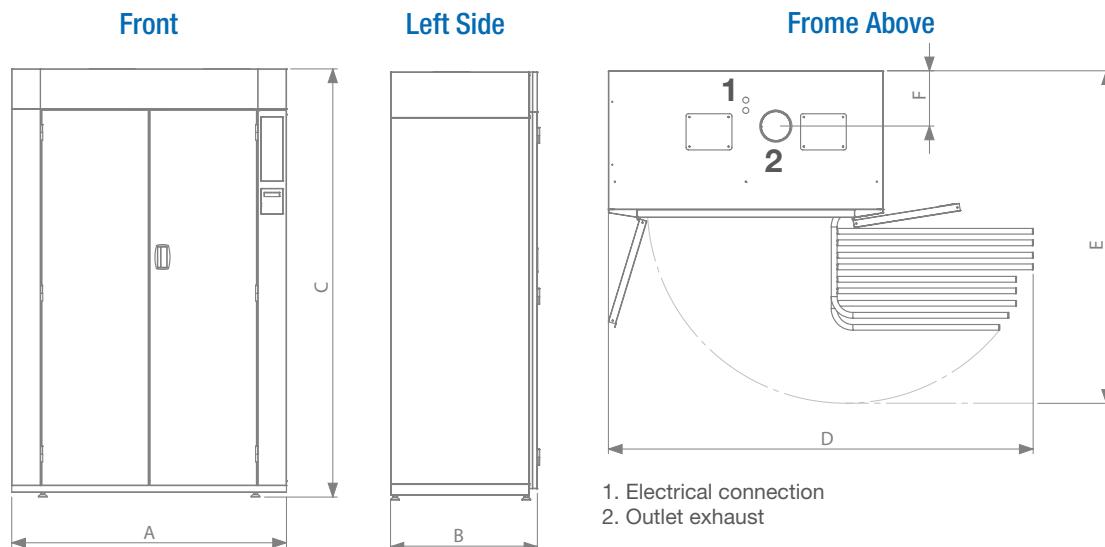

Dimenitions in / mm	A	B	C	D	E	F
	Width	Depth	Height	Width with hanging rail	Depth hanging rail	Exhaust position from back
TS 63 E	47.2 / 1200	25.1 / 638	73.6 / 1870	73 / 1855	57.2 / 1453	9.5 / 242

Technical Specifications ProLine TS 63 E

Main Data

Type	Air vented
Hanging length, ft / m	52.5 / 16
Capacity (dry weight), lbs / kg	17.6 / 8
Color	Grey
Product number	131033
Dimensions	
Width x Depth x Height, in / mm	47 x 25.2 x 74 / 1200 x 640 x 1870
Hanging frame rotation, °	180
Door opening, °	190
Minimum ceiling height, in / mm	82 / 2080
Shipping dimensions, Width x Depth x Height, in / mm	49 x 28 x 81 / 1250 x 700 x 2050
Weight	
Weight, lbs / kg	320 / 145
Shipping data net, lbs / kg	351 / 159
Sound level	
Airborne sound level, dB(A)	62
Consumption data, normal temperature	
Drying capacity, oz/min / g/min	2.2 / 62
Energy consumption, kWh	3.0
Residual moisture before drying, %	43
Residual moisture after drying, %	0
Standard electrical connections	
Electrical connection, 3P	208-240 V, 3P, 60Hz
Electrical connection, 1P (upon request)	208-240 V, 1P, 60Hz
Total effect, kW	6.3
Heating effect, kW	6
Breaker, A, 3P	30
Breaker, A, 1P	40
Air connections	
Outlet exhaust, Ø in / mm	4.9 / 125
Outlet air flow, cfm / m³/h	135 / 230
Pressure drop, max psf / Pa	1.46 / 70
Maximum air flow (at 0% pressure), cfm / m³/h	200 / 340
Control	
Languages, number	8
Other	
Prepared for payment system	Standard
Reversible hanging rack	Standard
Optional Accessories	
Single Bar	131070
Hooks for Drying Cabinet (3 separate rows with 4 hooks on each, 1 set is for 1 door)	131071



PODAB Group, 1330 Main Street, Floor 2.
 Sarasota, FL 34236, USA
 sales@podab.us
 +1 (800) 683-4873
 www.podab.us